



# PRODUCT SPECIFICATION SHEET

## MODEL: AF Standard Accordion Baffle

### DESCRIPTION


The Filter Systems model AF is a paint arresting baffle best used with wet coatings such as high solid enamels, epoxies, asphalts, varnish and other tacky coatings with larger particle size characteristics. The Accordion diverts airflow through a series of directional changes within the baffle which eliminates face loading.



### FEATURES

- ✓ Ideal for use in a variety of paint overspray applications (tacky-dry coatings, Adhesives, fiberglass, gel coats, asphalts, sealers, clear coats, stains, epoxies).
- ✓ Over 98% average spray removal efficiency\*\*\*
- ✓ Initial pressure drop of .12" @ 150 FPM.
- ✓ Paint holding capacity of 6.5 LBS/SQ.FT. of media.
- ✓ All components rated UL 900 for flammability.
- ✓ Thermally stable to 212 degrees F.
- ✓ Typically land-fillable (contains no known hazardous materials).
- ✓ Available in pads (20"x20", 20"x25", 36"x30').

### TEST DATA

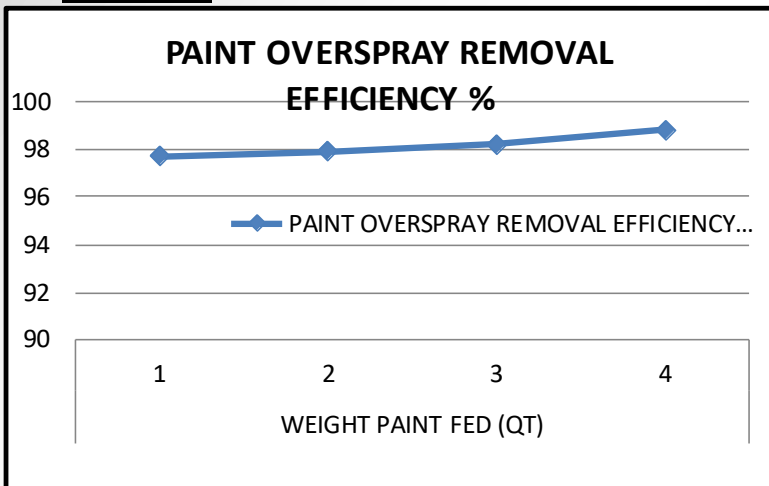

\*\*\*Actual test report available upon request.

### SELECTION CHART

PART #	SIZE	DESCRIPTION
AF-2020	20"x20"	Standard Accordion Pad
AF-2025	20"x25"	Standard Accordion Pad
AF-3630	36"x30'	Standard Accordion Pad

Custom sizes available. Call for quote.



45406 Trevor Ave.  
 Lancaster, CA 93534  
 TEL: 800-540-4 AIR  
 FAX: 805-981-8675  
 E-MAIL: sales@filtersystemsusa.com  
 WEB: www.filtersystemsusa.com

Distributed by: